


AIRMASTER®

MANUFACTURED BY
MD
CENTRAL VACUUMS

SPECIFICATIONS FOR MODEL

A700tv²

#A215DAJ 240 VOLT

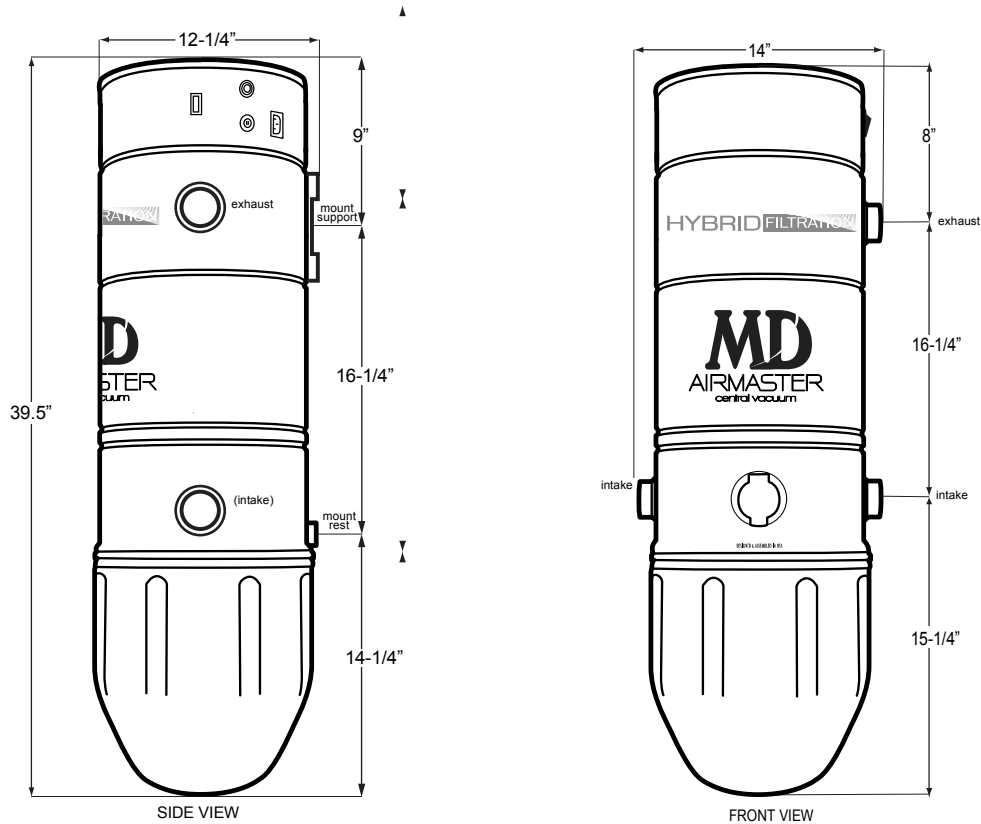

PERFORMANCE

Sealed Vacuum 145.9"
CFM 133
Air Watts 700
Volts 240
Amperage 7.6
Quietness 62 dBA
Coverage 10,000 ft²

*Recommended home size can be higher or lower when considering these factors: altitude, hours of use, complexity of pipe installation, distance of furthest inlet, noise level, type and size of filtration, and budget.

FEATURES

Motor: Single 2-stage thru-flow motor producing high CFM & waterlift.
Filtration: Inverted MicroTex cloth filter and optional closed TruSeal disposable bag. 8-gallon capacity.
Intakes: Right & left intakes. Utility Valve. Air relief valve.
Construction: Durable powder-coated all steel body. High Impact ABS Bucket.
Overload: Heat protection resettable minibreaker.
Dims/Weight: 12" Diameter, 39.5" Tall, 29 lbs.
Accessories: All MD accessories and kits are compatible and are sold separately.
Required: Air relief valve must be installed in the back side of opening.
Optional: Muffler.

INSTALLATION

Electrical: 240V 50/60HZ, 15 amp circuit. Separate circuit recommended. 6' Cord with typical 240v plug. Fits NEMA 6-20R receptacle.
Mounting: Single stud mounting. Easy to hang and remove. Mount high or low.
Venting: Exterior venting not necessary. 30ft maximum line if venting.

PROJECT		LOCATION	
DEALER		DATE / PRICE	



Designed & Assembled in USA

WWW.BUILTINVACUUM.COM/AIRMASTER

M.D. Manufacturing, Inc.
34970 McMurtrey Ave.
Bakersfield, CA 93308

800.525.2055
661.283.7550
FAX 661.283.7554