
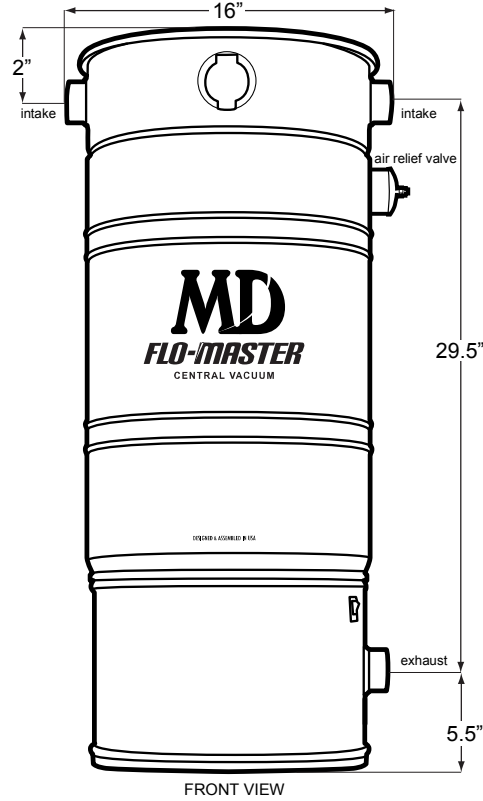


FLO-MASTER®

MANUFACTURED BY
MD
CENTRAL VACUUMS

SPECIFICATIONS FOR MODEL

F700t2
#F215DAD 240 VOLT

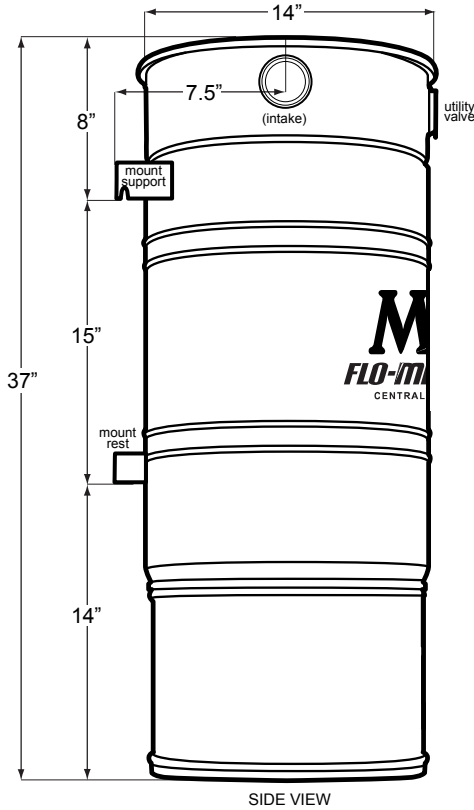

PERFORMANCE

- Sealed Vacuum 145.9"
- CFM 133
- Air Watts 700
- Volts 240
- Amperage 7.6
- Quietness 65 dBA
- Coverage 10,000 ft²

*Recommended home size can be higher or lower when considering these factors: altitude, hours of use, complexity of pipe installation, distance of furthest inlet, noise level, type and size of filtration, and budget.

FEATURES

- Motor: Single 2-stage thru-flow motor producing high CFM & waterlift.
- Filtration: HyperFlow™ disposable 12-gallon bag. Closed microfilter bag available.
- Intakes: Right & left intakes. Utility valve. Air relief valve.
- Construction: Durable powder-coated all steel body.
- Overload: Heat protection resettable minibreaker.
- Dims/Weight: 14" Diameter, 37" Tall, 38 lbs.
- Accessories: All MD accessories and kits are compatible and are sold separately.
- Optional: Muffler. Closed bag filtration.
- Required: Included air-relief valve must be installed in the back-side opening.

INSTALLATION

- Electrical: 240V - 50/60HZ, 15 amp circuit. Separate circuit recommended. 6' Cord with typical 240v plug. Fits NEMA 6-20R receptacle.
- Mounting: Two-stud 17" wide bracket. Easy to hang and remove. Left/right variable positioning. Mount 6" off ground. Leave 24" above unit.
- Venting: Exterior venting not necessary. 30ft maximum line if venting.

PROJECT	LOCATION
DEALER	DATE / PRICE



Designed & Assembled in USA

WWW.BUILTINVACUUM.COM/FLO-MASTER

M.D. Manufacturing, Inc. 800.525.2055
34970 McMurtry Ave. 661.283.7550
Bakersfield, CA 93308 FAX 661.283.7554